

Defense, Avionics, Space &

High Reliability Services







Mil-Standards

Custom Products

RF Testing Capabilities



Environmental Testing

Special Testing Capabilities









Johanson Companies

Johanson Dielectrics, Inc. and Johanson Technology, Inc. are located in Camarillo, California, and have over 50 years of experience specializing in the design and manufacture of high quality ceramic products. Johanson provides both Mil-Standard screening and COTS Ceramic Chip Capacitors, RF Passives, RF Inductors to high reliability applications globally.

In-House Testing Capabilities

In addition to manufacturing, the Camarillo facility has a complete High Reliability department with in-house testing capabilities.

Comprehensive Mil-Standard Testing Groups A, B & C

Electrical & Mechanical Inspections

- 100% Electrical Testing
- Cap, DF, IR, DWV, Voltage Breakdown
- 100% Visual Inspection (Mil 883 Class K or S Options)
- Full Data on Serialized Units
- Hot IR Testing
- Temperature Capacitance Coefficient (TCC)
- Temperature Voltage Coefficient (TVC)





Environmental Testing

- Burn In / Voltage Conditioning
- Life Testing
- Class H, K or S Element Evaluation
- HALT / HASS Testing
- Humidity Testing
- Moisture Resistance
- Resistance to Solder Heat
- · Shear Test / Bond Pull Test
- Bend Testing
- Steam Age
- Temperature Cycling
- Thermal Shock Testing
- Shock / Vibration Testing
- Wire Bond Testing

Analytical Testing

- Destructive Physical Analysis (DPA)
- Radiographic Inspection
- SEM Inspection
- · Solderability Testing
- Acoustic Microscopy (Sonoscan) Inspection
- XRF Analysis

RF & Microwave Testing Expertise

- Vector Network Analyzer Measurements
- · Resonant Line Measurements for ESR at Frequency

Simulation software and designer libraries.

Contact us with your high reliability needs.

Available Termination Options

MLCC Termination Options

	Barrier to Prevent										
Termination Type	Solder Leaching	RoHS	Primary Applications								
Ni/Sn	Ni	Yes	All solder applications where RoHS is required. This is Johanson's standard termination used by the largest number of customers. Most likely to be in stock at Johanson or at Johanson authorized distributors.								
Ni/SnPb	Ni	No	Military applications where the lead (Pb) mitigates Tin whisker growth.								
Flexterm Ni/Sn	Ni	Yes	Flexible terminations for high physical stress applications								
Flexterm Ni/SnPb	Ni	No	Flexible terminations for high physical stress applications								
Ni/Au Gold Termination	Ni	Yes	Parts are epoxied in place or a mix of solder and epoxy attachment is used. Controlled Au thickness to avoid Gold embrittlement issues when soldering. Premium price.								
Cu/Sn (Copper barrier)	Cu	Yes	This non-magnetic termination is best suited for application where very high inductance / magnetic fields are present. Use where RoHS is required. Most common non-magnetic termination.								
Cu/SnPb (Copper barrier)	Cu	No	This non-magnetic termination is best suited for application where very high inductance / magnetic fields are present.								
PdAg	None	Yes	No plating - solderable thick film PdAg alloy termination. Premium price.								
PtAg	None	Yes	No plating - solderable thick film PtAg alloy termination. Premium price.								
Single Layer Termina	tion Options										
TiW/Ni/Au	Ni	Yes	Chip & Au wire where capacitor is soldered in place or a mix of solder								

TiW/Ni/Au	Ni	Yes	Chip & Au wire where capacitor is soldered in place or a mix of solder and epoxy attachment is used.
TiW/Au	None	Yes	Chip & Au wire where capacitor is epoxy attached. Optimum termination for wirebonding. Cannot solder this chip as substantial leaching will occur.

Lead-Frame Termination Options

Ni	None	Yes	Used in very high-temp applications
Cu/Ni/SnPb	Ni	No	Typically used in military applications
CuSn6 Phosphor Bronze	Ni	No	SnPb plate
Iron-Nickel Alloy	Ni	Yes	Sn plate
Pure Silver Leads	None	Yes	Used in very high power RF. Premium price.

Contact us to quote your custom lead materials and types.

Ask a Question

If you have unique needs or require additional technical information, contact your Johanson Representative or submit a technical request on our website at:


https://www.johansontechnology.com/ask-a-question_or https://www.johansondielectrics.com/ask-a-question_

johansontechnology.com johansondielectrics.com johansondielectrics.com

Applications to Products Chart	t	Thin E.	IIIn Metallized Single Lay	Plans Discoidal Strates	ar & Discoidal I.	High I, Vanistors Pacifors	Collage M.C.	High z Radiz	High Class 1	Safety, CASS 2 Dic	Certified M. CCs (1)	SMPS NPO K (250 MAC)	REH. Stacked M. CCs	John Power High	RF His	RF INCCS COMPONE	Sus. Support
APPLICATIONS	Mic	\	/ P/9/	/b/d	High	/High	Hig.	16,1	/Hig.	Safe	/ ₀ 7	/Ws	1/4	1/4/	RA A	PF/	
RF Bypass / Decoupling					•	•	•	•	•		•	•					
Connector / Cable Filters			•	•			•	•			•					•	
Housing / Chassis Filters			•	•				•									
Mains Filtering Certified								•		•							
Power Conditioning / Rail Filtering					•	•	•	•	•	•		•	•				
SwitchMode Power Supply Filtering							•	•	•	•		•		•			
EMI / RFI Filtering	•	•	•		•	•		•			•		•	•			
DC Block / Coupling		•									•		•		•		
Antenna & Impedance Matching	•												•		•	•	
RF Filters (e.g. LC, Pi, BPF, LPF)	•		•	:							:		•	•	•	•	
Microwave Circuits	•	•											•	•	•	•	
Millimeterwave Circuits	•	•															
Power Amplifier Matching	•							•					•		•	•	
RF Circuit Matching	•												•		•	•	
MMIC SubMount		•															

Collaborative Design Products

Capstrate - Embedded Capacitors

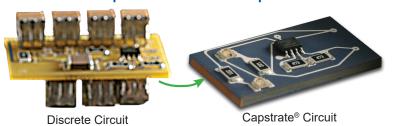

Variable Pitch Capacitors



Unique Geometries

Custom Substrates



k values - 9.3 to 40,000